CLEVERTOUCH / Product Specifications

Plus Series

Interactive Flat Panel for Education

As the need grows for more collaborative learning spaces, so does the demand for technology in the classroom. Clevertouch is embracing immersive learning by providing smart digital classroom environments. Our complete classroom solution is easy to use, enables simple installation, and is designed for over 50,000 hours of use. With low maintenance and no ongoing subscriptions, Clevertouch provides a complete all in one solution.



The award winning all-in-one solution for an immersive learning experience



Interactive Product of the Year AV News Awards 2018 – Winner



Digital Devices

BETTAwards 2018 - Finalist



Interactive Product of the Year AV Awards 2017 - Winner



Manufacturer of the Year AV Awards 2015 - Winner



Subscription free software to increase student engagement

Our range of software is designed to engage students and simplify the lesson planning process. Share resources with other teachers and make the most of pre-made lesson and activity templates. Both Lynx and Snowflake MultiTeach are designed with input from educators, enabling teachers to seamlessly collate media and resources to produce innovative lessons.



Apps for connected learning

With content in a variety of languages, for all ages and subjects, and with additional resources available to download for free, Clevertouch makes creating exciting lessons simple for teachers. Cleverstore contains hundreds of apps – all free to download, with no adverts or inappropriate content. All of the apps have been tested by our App team to ensure they meet curriculum requirements.



Screen mirroring with built-in teacher controls

Clevershare App is free to download and compatible with Android, Windows, iOS and Chrome devices. Up to 50 devices can connect with the Clevertouch screen and share content – images, video, and audio. The presenter has full control over what is shared, and can show up to 4 device screens simultaneously, increasing student collaboration and participation within every lesson.



Send messages, alerts and media to all of your Clevertouch screens remotely

With the new Clever Message App send dynamic digital signage messages to all, individual or groups of your Clevertouch screens. Your IT department or office can create messages using full-screen, easy to populate templates, produce live-video messages from the school principal, instructions during a fire drill, building maintenance information, daily news and general announcements.



Making integration and installation easier


Clevertouch interactive touchscreens are designed to integrate with your current system set up and work with your current software. With remote management tools, increased security and network options, and the most comprehensive warranty on the market, Clevertouch offers long-term savings and increased return on investment.



A natural and fluid writing experience

Our Super Glide Surface technology provides a natural and fluid writing experience, reminiscent of a pen and whiteboard. High precision touch pens are included, to facilitate dual-pen writing with no lag. Erase with your palm. Pinch and pull to zoom. Switch between finger-touch, pen, and dual-pen instantly without needing to alter settings.



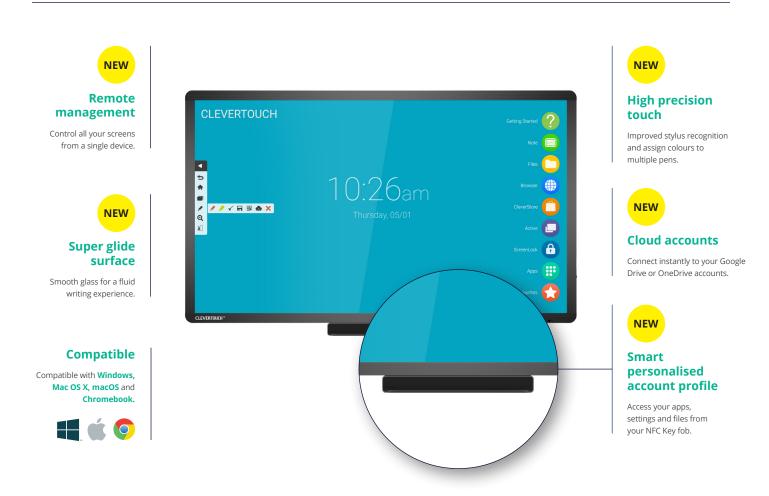



Clever Message

NEW

24/7 digital signage

Turn your Clevertouch into an interactive digital signage kiosk.

Branded power-up screen

Get your organisation's daily news when you power-up each day.

Live video streaming

Broadcast live or prerecorded audio and video to your screens.



Instant messaging


Send instant or timed messages to any of your Clevertouch screens remotely.

Alerts

Send important announcements at the touch of a button.

Group your screens

Send messages to groups of Clevertouch displays simultaneously.

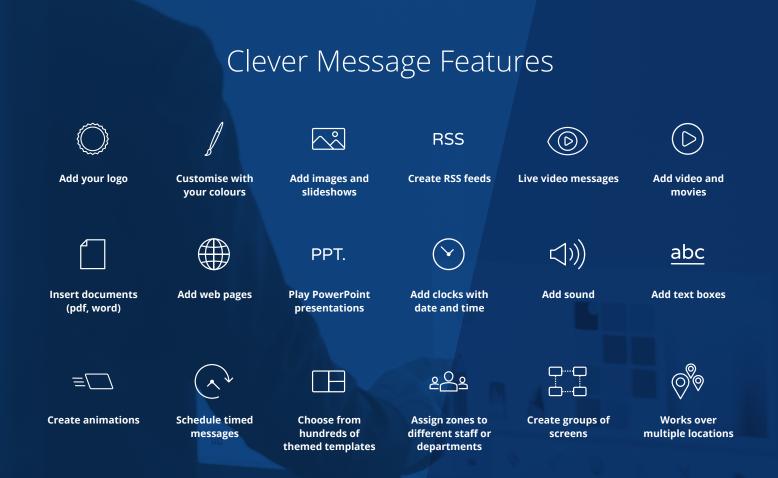



Plus Series

	55"	65"	75"	86"
Product Code	15455LUXHP	15465LUXHP	15475LUXHP	15486LUXHP
Display				
Screen Type	LED	LED	LED	LED
Aspect Ratio	16:09	16:09	16:09	16:09
Resolution	4K Ultra HD	4K Ultra HD	4K Ultra HD	4K Ultra HD
Backlight	D-LED	D-LED	D-LED	D-LED
Brightness (cd/m ²)	350	350	350	350
Response Time	8ms	8ms	8ms	8ms
Audio	2 x 12W	2 x 12W	2 x 12W	2 x 12W
Android	✓ × 12W	✓ × 12W	√	√
Glass	Anti Glare	Anti Glare	Anti Glare	Anti Glare
Super Glide Surface				√
Contrast Ratio	1200:1	1200:1	1200:1	1200:1
	1200.1	1200.1	1200.1	1200.1
nteractive System	20	20	20	20
Touch Points	20	20	20	20
Sensor Type	High Precision IR	High Precision IR	High Precision IR	High Precision IR
Vinimum Object Size (mm)	3	3	3	3
Response Time (Touch)	< 15ms	< 15ms	< 15ms	< 15ms
Connectivity				
JSB 2.0 / 3.0 / Touch	4/2/1	4/2/1	4/2/1	4/2/1
IDMI 1.4 In / 2.0 in	0/2	0/2	0 / 2	0 / 2
DisplayPort in	0	0	0	0
/GA Input	1	1	1	1
HDMI Out	1	1	1	1
CVBS (requires a 3.5mm to 3 x	1	✓	1	1
ohono socket, not included) PC-Audio	√	✓	√	√
/GA Output	х Х	×	У Х	×
AN (RJ45)	× ✓	× ✓	× ✓	× ✓
RS232	<i>J</i>	✓ ✓	J	J
Nodule Slots	2	2	2	2
	2	2	2	2
Power				
Power	250W	300W	450W	500W
Power (in standby)	<0.5W	<0.5W	<0.5W	<0.5W
EU Energy Rating – Efficiency Class	В	A+	С	В
Physical Specifications				
Dimensions W x H x D (mm / ")	1318 x 789 x 103 / 51 57/64 x 31 1/16 x 4 1/16	1537 x 913 x 99 / 60 33/64 x 35 15/16 x 3 57/64	1779 x 1032 x 100 / 70 3/64 x 40 5/8 x 3 15/16	2004 x 1176 x 99.6 / 78.9 57/64 x 46 19/64 x 3 59/6
Weight	36.5kg / 80lb 7.4oz 400 x 400 /	49kg / 108lb 600 x 400 /	57.8kg / 127lb 6.8oz 800 x 400 /	73.7kg / 162lb 8oz 800 x 600 /
/ESA (mm / ")	15 3/4 x 15 3/4	23 5/8 x 15 3/4	31 1/2 x 15 3/4	31 1/2 x 23 5/8
Android Capabilities				
Remote Management (MDM)	1	✓	✓	1
nstant Updates (OTA)	<i>v</i>	<i>J</i>	✓ ✓	1
System Version	LUX 7 (powered by Android 7.1 Nous	aat)	-	-
	RK3399 Dual-core ARM Cortex A72 a	-		
Android Resolution	1080p	1080p	1080p	1080p
GPU	Mali-T860	Mali-T860	Mali-T860	Mali-T860
AM	4G	4G	4G	4G
ROM				
Vi-Fi Enabled	16GB ✓	16GB ✓	16GB ✓	16GB ✓
	·	v	·	v
Apps and Android Features		,		
Note App	1	<i>√</i>	1	1
mail Out		✓ 	1	1
leverstore		✓ 	1	1
ynx App	1	\checkmark	1	1
ynx Pro	×	X	×	X
Elever Message – Digital signage enabled NEW	1	\checkmark	1	1
Dual pen mode NEW	1	1	1	1
Clevershare 2 App NEW	✓	✓ ✓	✓	1
Software				
ynx	√	✓	1	1
inowflake	✓ ✓	✓ ✓	J	J
	✓ ✓	✓ ✓	J	J
DisplayNote Aontage	×	×	У Х	×
ynxPro Meeting	X X	× ×	X X	×
			r	^
Accessories				
5 PC Module included (1541041)	×	X	X	X
	1	\checkmark	1	1
JSB Camera Ability		2	2	2
JSB Camera Ability Vriting Pen or Stylus	2			
JSB Camera Ability Vriting Pen or Stylus /GA, Audio Cables	\checkmark	∠ ✓	1	1
JSB Camera Ability Nriting Pen or Stylus /GA, Audio Cables HDMI, USB Cables	✓ ✓	J J	1	1
JSB Camera Ability Nriting Pen or Stylus /GA, Audio Cables	\checkmark	✓		


Plus Series

55"

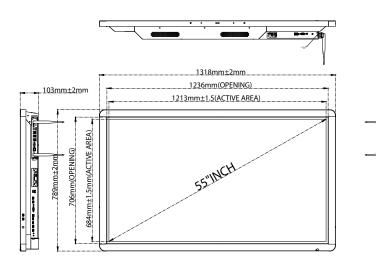



65"

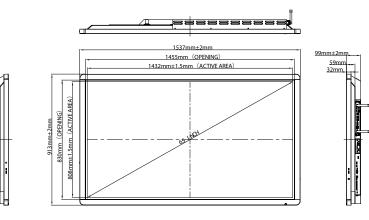








Plus Series

75"

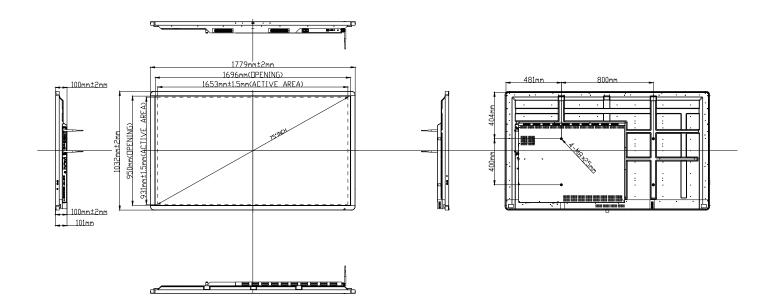

86"

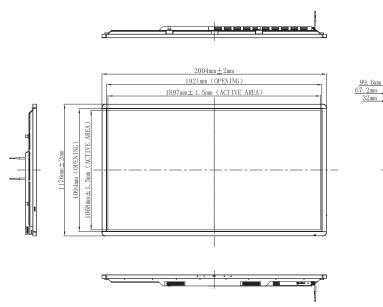



Clevershare Wireless Device

Wirelessly transmits Video, Audio and Touch

With the Clevershare wireless device you can control your Clevertouch from anywhere in the room, without the need for any wires. Simply plug the Clevershare into your laptop's USB port and you can show and edit your laptop's content on your Clevertouch screen. You can instantly display your desktop and control from your computer or Clevertouch – your pen or finger becomes your mouse.

Product Features

- Simple operation, one button projection
- Up to eight computers can be connected at the same time
- The USB data interface applies to all computers
- Windows and Mac OS compatible
- Low power consumption, no additional power supply
- Exclusive to Plus Series and Pro Series

Security Features

- Clevershare uses a "private" SSID that is only accessible between the receiver (Clevertouch IFP) and transmitter (dongle), this connection is setup when the dongle is paired with the Clevertouch
- The SSID uses the WPA2 encryption (based on 128bit AES) on the transport layer, but no data encryption on the application layer
- Since the video transfer is not on a public network, no other clients are allowed to join in
- The video transfer should be regarded as secure



Interface				
USB 2.0	1			
Function				
Operating Systems supported	Windows 7/8/8.1/10; OSX 10.9/10.10/10.11			
Frame Rate	15–20fps Windows 7/8/10 1366x768 @ 15–20fps Windows 7/8/10 1920x1080 @ 15–20fps Mac-Bit rate (600KB) @ 25fps Mac-Bit rate (300KB) @ 20fps			
Power				
Power Consumption	2.5W			
Transmitter Power	16mW			
Physical Specifications				
Dimensions L x H x W (mm / ")	77 x 178.7 x 21.3 / 7 23/64 x 1 7/64 x 0 15/16			
Dimensions (Package) L x H x W (mm / ")	210 x 44 x 111 / 8 17/64 x 4 3/8 x 1 47/64			
Net Weight	86g			
Gross Weight	195g			

Clevertouch PC Modules



Product Code	i5 PC Module ¹⁵⁴¹⁰⁴¹	i7 PC Module 1541042	
Туре	PC Module	PC Module	
Model	MT21	MT21	
CPU	Intel® Core™ i5	Intel® Core™ i7	
RAM	DDR4 4Gb	DDR4 8Gb	
SSD	128Gb	256Gb	
Graphics	Integrated Intel® HD Graphics/Independent Graphics	Integrated Intel® HD Graphics/Independent Graphics	
Chipset	Intel H110 Express	Intel H110 Express	
Sound Card	Integrated High Definition Audio Stereo	Integrated High Definition Audio Stereo	
Networking	Integrated 10/100/1000M Adaption	Integrated 10/100/1000M Adaption	
WIFI	802.11ac (2.4GHz/5GHz)	802.11ac (2.4GHz/5GHz)	
Operation System	Windows 10 Pro installed	Windows 10 Pro installed	
USB3.0	6	6	
LAN(RJ45)	1	1	
VGA Output	1	1	
Earphone Output	1	1	
Microphone Input	1	1	
Display Port	1	1	
HDMI Output	1	1	
Power			
Power Supply Mode	Internal Power Supply Module	Internal Power Supply Module	
Power Requirements	100-240V~ 50/60Hz	100-240V~ 50/60Hz	
Max Power	95W	95W	
Standby Power	1.35W	1.35W	
Physical Specs			
Cover Material	SECC	SECC	
Dimension L x W x H	246.2 x 265.4 x 32.2mm	246.2 x 265.4 x 32.2mm	
Net Weight	1.9kg	1.9kg	
Environmental Condition			
Operation Temperature	0°C – 45°C	0°C - 45°C	
Operation Humidity	10% - 90%	10% – 90%	
Storage Temperature	-20°C - 60°C	-20°C – 60°C	
Storage Humidity	10% – 90%	10% – 90%	
ESD			
Contact Discharge	±4KV passed level A test(CB)/ ±6KV passed level B test(CB)	±4KV passed level A test(CB)/ ±6KV passed level B test(CB)	
Non-contact Discharge	10% ±8KV passed level A test(CB)/ ±12KV passed level B test(CB)	10% ±8KV passed level A test(CB)/ ±12KV passed level B test(CB)	

 Tél. +352 26 380 1
 Fax +352 26 380 380
 sales@ck-group.lu

 2, rue Léon Laval - Z.A. Am Bann
 L-3372 Leudelange
 ck-group.lu