


Liso room manager

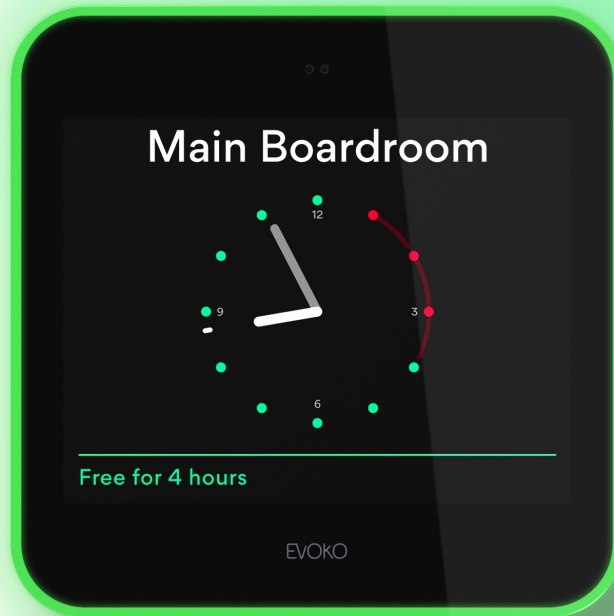

The complete room manager

evoko™

Meet Liso room manager

A self-hosted device for easy interaction and room booking. This is the heart of our self hosting suite, a room manager that brings all the features you need in a room booking device. It's placed outside each bookable meeting room, conference room and other bookable areas.

Self-hosted

With this solution you will have full control over your self-hosted server installation and devices.


All included

Pay a one-time cost and receive a lifetime of product support and free updates.


See room status at a glance

A room booking system should be more than a list of features. We believe it must be easy to use and that it should look sublime in any office. Liso room manager rocks our trademark intuitive light signals to guide you to the right room and clearly see the room status from a distance.


AVAILABLE



BOOKED WITHIN
10 MINUTES

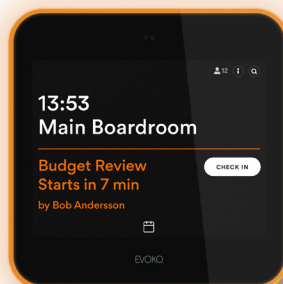

BUSY



A new level of intuitive user interface


Liso room manager has built in proximity sensor that unfolds a new layer of information as you approach the screen to show you everything you need to know. Use the touch screen to quickly find a room for your spontaneous meetings. Small icons represent the room's equipment so you can pick the rooms that serve your needs. You can also report broken or missing meeting equipment directly on the screen.

DISTANT VIEW



Room name, status and current time shown in a larger font.

CLOSE VIEW

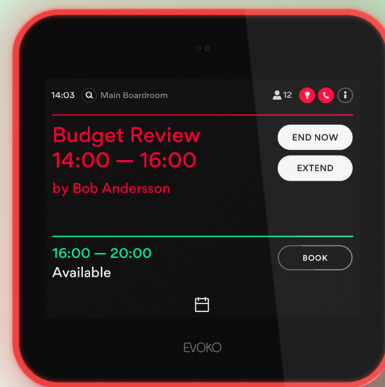

Detailed view with access to action buttons.

Bright and helpful

Liso room manager makes it easier than ever to book a room with your favorite digital calendar, or directly on the screen using your fingertip.



SPECIFICATIONS

TECHNICAL INFO

Display

- 8 inch capacitive touch with antifingerprint treatment

Connectivity

- Wi-Fi - 802.11 a/b/g/n
- Ethernet - RJ-45, 10/100/1000Mbit
- PoE & PoE + RFID
- 13.56 MHz reader
- ISO/IEC 14443A/B
- Supports MIFARE 4K/1K card (does not support ISO/IEC 15693 or MIFARE Ultralight C)

Power

- Power over Ethernet (PoE), or
- 12V AC/DC power adapter (accessory)

Sensors

- Proximity sensor
- Ambient light sensor

Mounting

- Mounting options for both standard and glass walls
- 5-way cable exit option for easy and neat installation

Other

- 3-way indirect light aura to make room status visible already from a distance
- Open API for third party integration
- Communication via real-time two-way connection
- Remote management with multi-site support
- Real-time monitoring & statistics

Server

- Recommended specifications: Dual Core CPU-4GB-30GB

COMPATIBLE PLATFORMS

- Microsoft Office 365
- Microsoft Exchange 2016
- Microsoft Exchange 2013
- Microsoft Exchange 2010
- Google G Suite
- IBM/Lotus Domino Smartcloud
- IBM/Lotus Domino 8.5.3 – 9.x
- Multi-tenant booking (stand-alone version)

SIZE AND WEIGHT

- Size: 200 x 200 x 25 mm (7.9 x 7.9 x 1.0 inch)
- Weight: 1.3 kg (2.9 lbs)

USER INTERFACE LANGUAGES

- Arabic
- Catalan
- Chinese, Simplified
- Chinese, Traditional
- Czech
- Danish
- Dutch
- English
- Estonian
- Finnish
- French
- Galician
- German
- Italian
- Japanese
- Latvian
- Lithuanian
- Norwegian
- Polish
- Portuguese
- Russian
- Spanish
- Swedish
- Thai

PRICING MODEL & BOX CONTENTS

Our pricing model is based on the same simplicity as our products; it is a one-time cost per unit and that is it. There are no licensing costs or subscription fees and all required hardware, software, support and warranty are included. The one-time cost includes:

- Liso room manager (hardware with Liso application)
- Mounting kits for both standard and glass walls
- Evoko Home application (used for configuration, synchronization and administration)
- Future software upgrades for the Liso room manager unit and Evoko Home
- Power Supply (if needed, typically installed with PoE)
- 2-year warranty (up to 3 more years can be purchased separately)
- Product support via phone/email/web-tickets for as long as the Liso units are used.

ARTICLE NUMBER

ERM2001

AWARDS

